



BONDTECH

Reliability and Performance

- +
 - +
 - +
 - +
- Control**
Materials
Reliability
Resolution



BONDTECH's
Direct Drive System with
for Creality3D CR-10S E3D V6 Hotend

Scan this to
Know more



Scan this to
Get the guide



Technical Datasheet


EAN Code	7350011410606
Net Weight	539g
Gross Weight	616g
Package Size	153x115x115mm
Gearing Ratio	3:1
Filament Thickness	1,75mm
Nozzle Diameter	0,4mm
Nozzle Temperature	0- 120°C
E-steps value	415
Voltage Requirements	12v
Max Power Input	60w

What's in the box:

Main Assembly with:
Bondtech BMG Extruder
E3D V6 Hotend
PTFE Tube
Power Cables
Plus:
Bondtech Accessories Bag
E3D's V6 Accessories Bag

Compatible with

**Creativity3D
CR-10S**

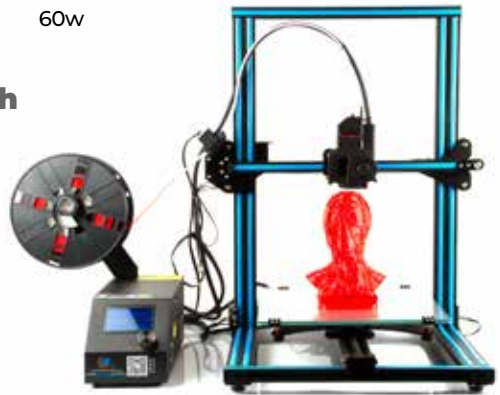

Top Advantages

- Compact and low weight design;
- User friendly - ready to plug in once mounted on your printer;
- High resolution – optimized gearing ratio together with the Dual Drive Gear technology;
- Feeding all material with high reliability, from slippery nylons and soft TPU/TPE filaments to highly rigid and sometimes brittle carbon-filled high-strength materials;
- Uninterrupted prints without fear of grinding or slipping.

www.BONDTECH.se

Bondtech AB
Repslagarevägen 3J
331 53 Värnamo
Sweden

Made in Sweden

